


1. Rotating Eye bolt

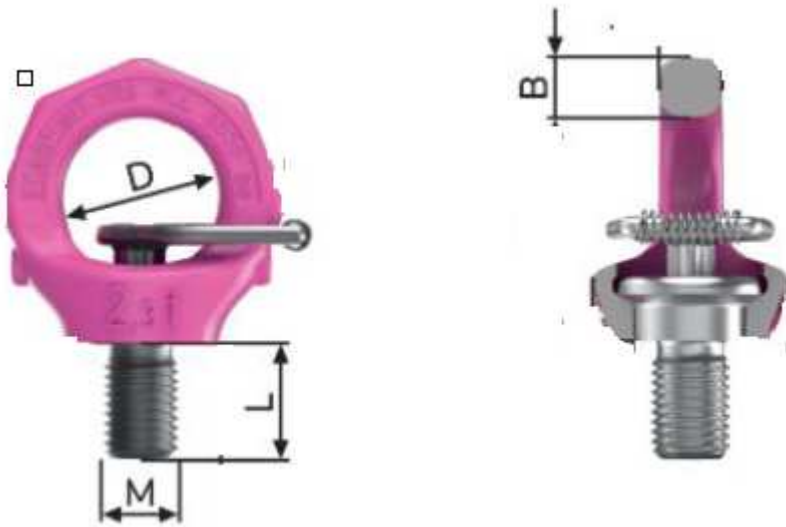

SL NO	NOMINAL SIZE (M in mm)	Minimum WORKING LOAD LIMIT IN TONNES	Minimum WORKING LOAD LIMIT IN TONNES WHEN $B=90^\circ$	D (IN MM)	B (IN MM)	L(IN MM)	QTY
1.	M6	0.5	0.1	20	9	9	16
2.	M8	1	0.3	25	11	12	16
3.	M12	2	0.75	30	13	18	16
4.	M16	4	1.5	35	15	24	8
5.	M24	8	3.2	49	20	36	8

Dimensions D,B,&L are tentative dimensions with a tolerance of +/-5%

- Lifting point pivots 360 deg .Easy adjustable in force direction
- Clear marking of the minimum WLL for all loading directions
- Easy-Fit-Key for easy assembly and disassembly
- Material shall be alloy steel
- Compliance to DIN 580 or equivalent
- Minimum safety factor shall be 4:1